



Also available as blackline



Made in Germany




Solar module series alfasolar Pyramid 60

At alfasolar we have been working on the improvement of solar modules since 1993. During this period we have experienced that the right selection not only of materials but also of the production process is the basis for durable products such as solar modules.

With the "alfasolar Pyramid" solar modules we present you an innovative and exclusive product line with a multitude of benefits: so that it is that much easier for you to decide from the wide range of products available on the market.

- **Higher solar-module efficiency, up to 15.3%**
 - Excellent value for money
- **Higher energy yield**
 - Up to 5% more yield through Pyramid technology
 - Outstanding partial load performance through particularly efficient soldering and selected solar cells
- **Long service life**
 - 4 mm glass and extremely strong aluminium frame in silver or black
 - Secure embedding of sensitive glass edge using UV-resistant silicon
 - Very strong 3 layer rear foil in white or black with high insulation-breakdown resistance
- **Matching supplementary components**
 - alfasolar A2 installation stand for high strength, fast assembly and 10-year guarantee
 - Proven Radox and Titanex solar cable
 - Grid inverters from market leaders
- **Best guarantee conditions**
 - 10-year workmanship warranty, 25-year linear performance guarantee*
 - Higher guaranteed power over the time
 - * see alfasolar's current guarantee conditions
- **Made in Germany**
 - State-of-the-art production line in Hanover, Lower Saxony
 - Experience in manufacturing of solar modules since 2001

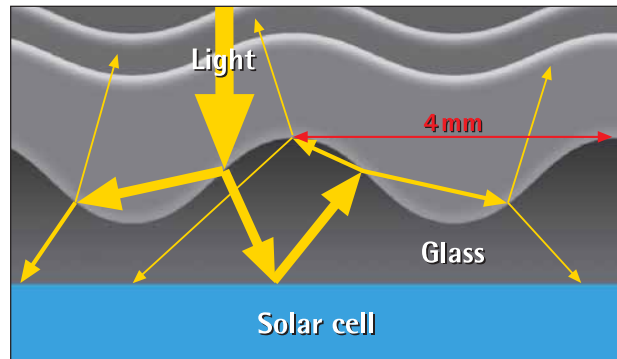


- Pyramid-structured glass with self-cleaning effect
- 3.5% more performance from perpendicular irradiance
- 20% more performance from oblique irradiance (80°)

alfasolar modules were always something special. Find out more by reading our flyer "The alfasolar Pyramid solar module series with lasting benefits", which we will send to you on request.

We look forward to hearing from you!

alfasolar GmbH
 Ahrensburger Straße 4-6
 D-30659 Hannover

Sales:
 Fon +49 (0) 511 261 447-10
 Fax +49 (0) 511 261 447-50
 export@alfasolar.de

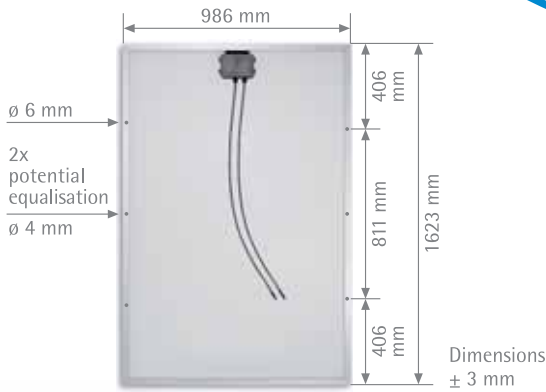

Very strong and reliable polycrystalline high-performance cells with an efficiency of 17%




Special pyramid structured glass for even more yield at insolation angles between 40 - 70°




High-quality, service-friendly connector box

V-I curve at different irradiation

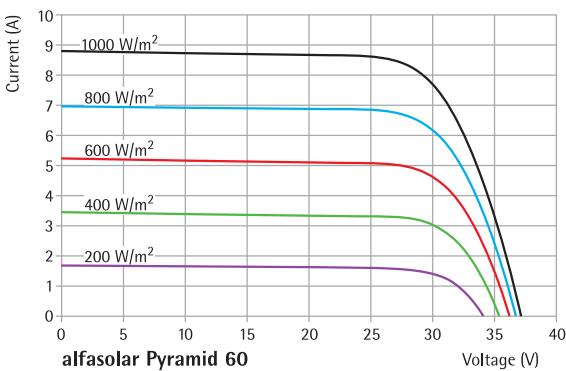

Excellent partial-load performance

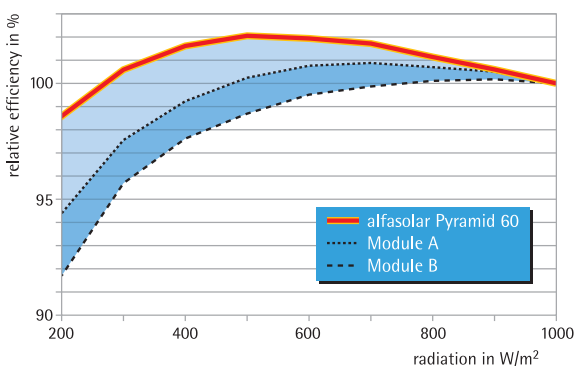

Physical data

Dimensions/weight	1623 x 986 x 35 mm/20.4 kg
Cell type	60 polycrystalline solar cells 156 x 156 mm
Connector box	IP 65 with H+S-Twistlock-connectors 2 x 1.0 m Radox cable 1 x 4 mm ² W x H x D = 141 x 101 x 28 mm
Bypass diodes	3 x 12 A/1000 V
Vertical hole spacing	811 mm/hole size M 6

Limiting values /Qualifications

Permissible module temperature range	-40 to +85 °C
Maximum permissible system voltage	1000 V
Surface pressure/suction	5400/5400 N/m ² *
Maximum reverse current	18 A
Humidity at 85 °C	85 % relative
Positive sorting P _{Flash} ≥ P _{max}	-0/+5 Wp
Application category/fire class (according to IEC 61730)	A/C

* see alfasolar's instruction manual

Thermal data

α [I _{sc}]	+2.3 mA/°C	γ [P _{mpp}]	-0.4 %/°C
β [U _{oc}]	-116.0 mV/°C	NOCT	42 ± 2 °C

Electrical data

	alfasolar Pyramid 60			
Power output P _{max} at STC (W _p)	230	235	240	245*
Short-circuit current I _{sc} (A)	8.51	8.57	8.63	8.69
Open-circuit voltage U _{oc} (V)	36.81	37.04	37.27	37.50
Current in MPP I _{mpp} (A)	7.81	7.92	8.02	8.12
Voltage in MPP U _{mpp} (V)	29.45	29.70	29.95	30.20
Bulk factor (%)	73.4	74.1	74.7	75.3
Power output (W/m ²)	143.7	146.9	150.0	153.1

Outstanding partial-load performance; at low irradiance level of 200 W/m², 95% +/-0.5% of the STC efficiency is achieved. Metering precision of maximal power output is +/-4%.

Electrical data

	alfasolar Pyramid 60			
(800 W/m ² , NOCT, AM 1.5)	230	235	240	245*
Maximal power output P _{max} (W _p)	175.1	179.1	183.0	186.9
Short-circuit current I _{sc} (A)	6.83	6.88	6.93	6.98
Open-circuit voltage U _{oc} (V)	34.83	35.06	35.29	35.52
Current in MPP I _{mpp} (A)	6.28	6.37	6.45	6.53
Voltage in MPP U _{mpp} (V)	27.88	28.12	28.37	28.62

*available as long as stock lasts

Information valid as of 04/2012. This data sheet complies with the regulations of European standard 50380. alfasolar reserves the right to change specifications. Doc.-No. DBE-04.



Quality management system to DIN-EN-ISO 9001:2008



Environmental management system to DIN-EN-ISO 14001: 2009

